



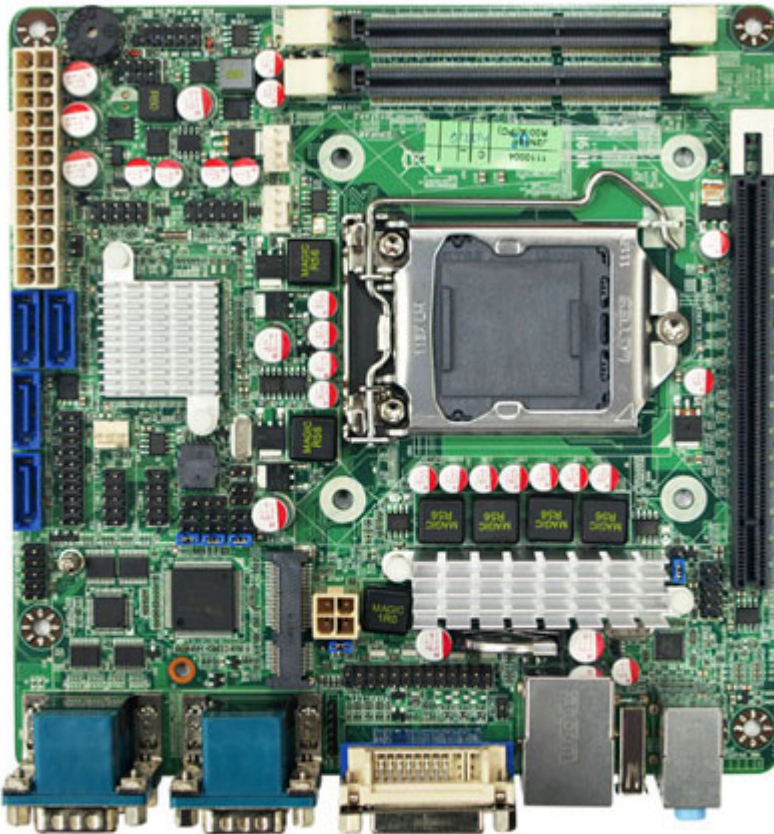

174.00 EUR  
incl. 19% VAT, plus [shipping](#)

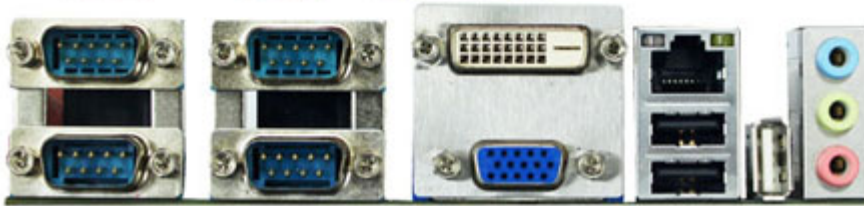

Support:  [Specifications \[EN\]](#)

- Intel® H61 Express Chipset
- Supports Intel LGA 1155 Socket Core™ i3, i5, i7 & Pentium Processors
- 2 \* Dual Channel DDR3-1333/1066 up to 16GB
- Realtek RT8111EVL Gigabit LAN
- PCI Express x16 Slot
- 4-port SATAII 3Gb/s
- DVI-D, and VGA Video Outputs
- Built-in Watchdog Timer Technology
- Mini-ITX Form Factor (170mm x 170mm)
- **CPU** INTEL® LGA 1155 Socket Core i7/i5/i3/Pentium Processor
- **Chipset** INTEL® H61 Chipset
- **Memory** 2 \* 240 pin 4GB 1333/1066 Dual CH DDR3 SDRAM DIMM Max. up to 16GB
- **Expansion Slots** 1 \*PCIe x 16
- **Storage** 4 \* Serial ATA2 3Gb/s connectors
- **Audio** Realtek ALC662 6-Channel HD Audio CODEC
- **Ethernet LAN** Realtek RT8111EVL Gigabit Ethernet LAN
- **USB** Embedded 7 \* USB 2.0/1.1
- **Special Features** Support ACPI S3  
Support CPU Smart FAN  
Support Watch Dog

- 
- **Rear Panel I / O**
    - 3 \* USB 2.0/1.1 ports
    - 1 \* RJ-45 port
    - 4 \* COM ports
    - 1 \* DVI-D port
    - 1 \* VGA port
    - 3 \* Audio Phone Jack
  - **Internal I / O**
    - 2 \* USB 2.0/1.1 headers for 4 USB 2.0 ports
    - CPU /NB / Chassis Fan connectors
    - 1 \* GPIO header
    - 1 \* Parallel header
    - 2 \* COM headers (COM6 for RS232/422/485)
    - 1 \* CIR header
    - 1 \* TPM header
    - 1 \* Chassis Intrusion header
    - 1 \* FP AUDIO header
    - 1 \* 24-pin & 4-pin 12V ATX Power connector
  - **BIOS**
    - AMI EFI 64MB SMT Flash ROM
  - **Form Factor**
    - Mini-ITX Form Factor (170mm x 170mm)
  - **Functional**
    - ATM, Automation, medical Equipment, Security, Networking, POS, General Application, Gaming Machine, Transportation
  - **Certificate**
    - CE, FCC, RoHS
  - **Temperature**
    - Operating within 0~60 centigrade
    - Storage within -20-85 centigrade

**Product Accessories**

- 2x COM cable
- Manual
- CD
- 2x SATA cable
- I/O shield