


999.00 EUR
incl. 19% VAT, plus [shipping](#)

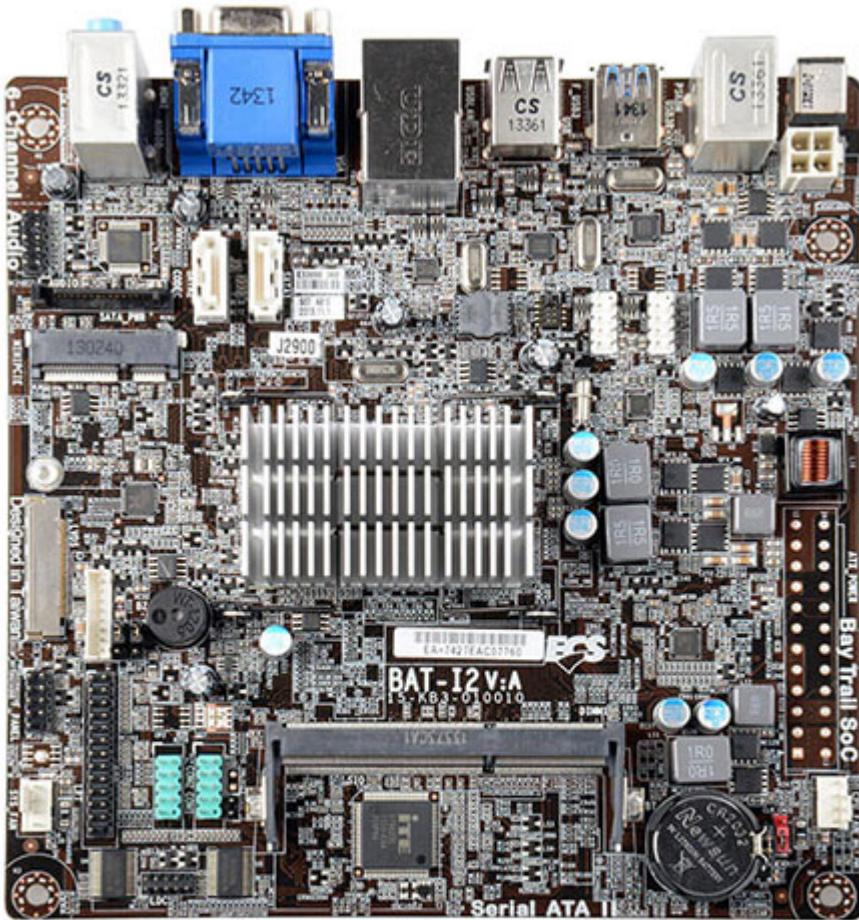

- Applied Solid Capacitor for CPU VRM to ensure a longer lifespan for system
- ECS Durathon Technology ensure the stability, reliability and performance of system.
- Dual Display design for multiple output support
- Integrated Printer (LPT) port / header to expand functionality
- Microsoft Windows 8 Certified
- Intel® VRD 12 Ready
- Supports DirectX® 11 to enhance graphical performance
- Supports HDMI 1.4a Technology (resolution up to 1920X1200) and HDCP function
- Free Bundle: CyberLink Media Suite

Supports Intel® CNVi

CPU	Onboard Intel® Bay Trail
	processors
	On-Board CPU Intel® Bay
	Trail J1900 processor
	VRD 12.0
GRAPHICS	Solid Capacitor for CPU
	side
	Supports Intel®
	Hyper-Threading
	Technology
MEMORY	Supports DirectX® 11
	Supports Full HD 1080P
	Blu-ray / HD-DVD
	Playback
	Single-channel DDR3
EXPANSION SLOT	Memory architecture
	1 X DDR3 SO-DIMM
	socket
	Support up to 8 GB
	1 X Mini PCI Express X1 slot(s) for Wi-Fi /Bluetooth modules
Storage	2 X Serial ATAIII 3Gb/s
	6-Channel HD audio
	CODEC Realtek ALC662
	Realtek ALC662 6-channel
	High Definition audio
Audio	CODEC
	Meets performance
	requirements for Microsoft
	WLP 3.08 Vista premium
	and mobile PCs
LAN	Six channel DAC supports
	16/20/24-bit PCM format
	for 5.1 channel audio
	solution
	Emulation of 26 sound
USB	environments to enhance
	gaming experience
	Voice Cancellation and
	Key Shifting in Karaoke
	mode
LAN	Compatible with Direct
	Sound 3D™, A3D™,
	I3DL2
	Realtek RTL8111G
	Gigabit Fast Ethernet
USB	Controller
	1 X USB3.1 Gen1 port(s) up to 5Gb/s
	8 X USB2.0 port(s) Up to 480 Mb/s (Back Panel 4 port(s), Onboard 4 port(s))

REAR PANEL I/O	1 X PS/2 Keyboard & PS/2 mouse connectors
	1 X Audio port (Line Out/Line In/Mic In)
	1 X RJ-45 port
	1 X HDMI port(s)
	1 X D-Sub (VGA) port(s)
	1 X USB3.1 Gen1 port(s)
	4 X USB2.0 port(s)
	1x DC-In connector
	1 X 4-pin CPU_FAN connector with smart fan
	1 X 4-pin SYS_FAN connector with smart fan
	1 X Front Panel MIC/Speaker out header
	1 X Front Panel switch/LED header
	1 X USB 2.0 header (Support additional 2 USB ports)
	2 X SATA II 3Gb/s connector(s)
	1 X CLR_CMOS header
CONNECTORS & HEADERS	2 X Serial port header (COM)
	1 X Parallel port header (LPT)
	1 X LVDS connector (optional)
	AMI BIOS with 8 MB SPI Flash ROM
	Supports ACPI 5.0 & DMI
	Dual Display
	Plug and Play, STR (S3) / STD (S4) , Hardware monitor, Multi Boot
	Multi-Language BIOS
	Audio, LAN, can be disabled in BIOS
	Dual-Monitor function
SYSTEM BIOS	Mini ITX Form Factor
	170*170
	Windows 7 64-bit
FORM FACTOR	Windows 8.1 32-bit
	Windows 8.1 64-bit
	Windows 10 64-bit
	Windows 10 32-bit
OS Support	CE/FCC Certification
	ErP/EuP Certification
	WHQL Certification
	WHCK Certification
Certifications	